

# FXTL-10

Intel Tiger Lake-U Processor based Mini PC with 4HDMI



## Features

- CPU: Intel Tiger Lake-U Processors
- Memory: Dual Channel SO-DIMM DDR4 for Memory up to 64GB
- Display: Intel Iris Xe/UHD Graphics, Displays via 4xHDMI
- I/O Ports: 2xLAN, 1xCOM, 2xUSB3.2, 4xUSB2.0
- Expansion: 1x M.2 for WiFi, 1x M.2 for 4G/5G, 1x PCIe2X
- Storage: 1xM.2 for NVMe SSD, SATA3.0
- Power: 12V DC-in



IoT Solutions  
Alliance  
**Industrial Solution  
Builders Specialist**

## Introduction

The Maxtang FXTL-10 is an embedded mini-PC based on the Intel Tiger Lake-U processor, provides a complete PC platform with powerful performance. Its memory has dual-channel SO-DIMM DDR4 up to 64GB, display via 4x HDMI2.0 with Intel Iris Xe or UHD Graphics. Features two 1-Gigabit Ethernet controllers and 3x M.2 for SSD modules, Wi-Fi, and 4G/5G. A rich input/output interface includes 2x LAN, 1x COM, 6x USB, 2 x Audio Ports (Mic-in+ Line-out) with standard 12V DC-in, caters to most market's requirements.

The FXTL-10 is an ideal solution for various applications, examples like high-speed communication, front-end mini-server. Great for high-resolution display products like electronic gaming machines, etc. Maxtang is a member of the Intel IoT Solutions Alliance on Industrial Solution Builders Specialist. This product retains the robust design of all Maxtang product lines at a new cost-effective price point. Its powerful features can provide a great user experience, increase productivity with stability, reliability.

## I/O Interfaces



H/W Monitor




Watchdog



GPIO




Brightness

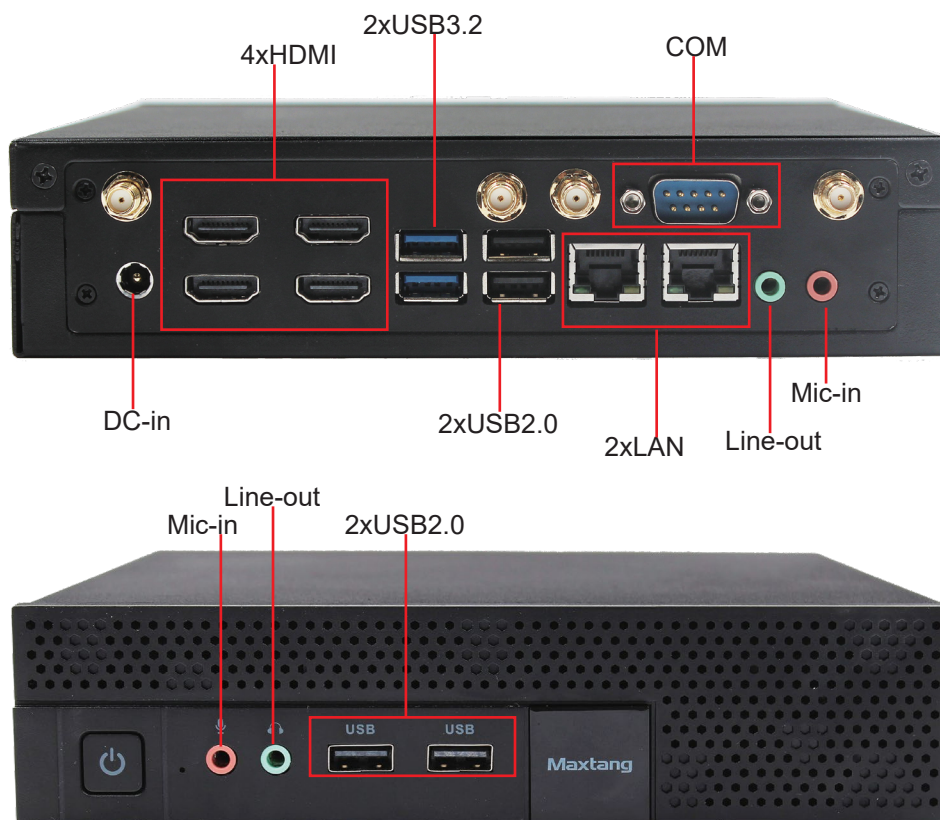

## Technical Specifications

Processor	CPU	Celeron-6305	i3-1115G4	i5-1135G7	i5-1145G7	i5-11320H	i7-1165G7
	Base Frequency	1.80GHz	3.00GHz	2.40GHz	2.60GHz	2.50GHz	2.80GHz
	Max Turbo Frequency	/	4.10GHz	4.20GHz	4.40GHz	4.50GHz	4.70GHz
	Cache	4MB	6MB	8MB	8MB	8MB	12MB
	BIOS	AMI UEFI BIOS					
Memory	Type	Dual Channel SO-DIMM DDR4					
	Max Capacity	64GB					
Display	GPU	Intel® Integrated Graphics (Iris Xe/UHD Graphics depends on CPU)					
	Display Port	HDMI2.0					
Ethernet	Speed	10/100/1000 Mbps					
	Controller	intel i211					
	Interface	RJ-45					
Audio	Audio Codec	Realtek HD					
	Interface	Line-out+Mic-in, supports audio header and amplifier header					
Hardware	CPU temperature, system temperature, onboard voltage, watchdog						
Storage	M.2	1x M.2 for NVMe SSD					
	SATA3.0	1x SATA3.0					
Expansion	M.2	1x M.2 for Wi-Fi					
		1x M.2 for 4G/5G					
	PCIe	1x PCIe2X					
I/O Interface	HDMI2.0	4					
	USB2.0	4					
	USB3.2	2					
	LAN	2					
	COM	1xCOM: 1*RS232 default RS485/RS422 optional by jumper					
	Line-out	2					
	Mic-in	2					
Dimension	Size	208 mm x 190 mm x 45mm (L x W x H)					
Power	Standard Port	12V DC-in					
Temperature	Operating Temp.	-20°C to 60°C					
	Storage Temp.	-40°C to 80°C					
Cooling	Active						
Operating System	Win 10/11 64bit, Linux 64bit						

Dimension(in mm)

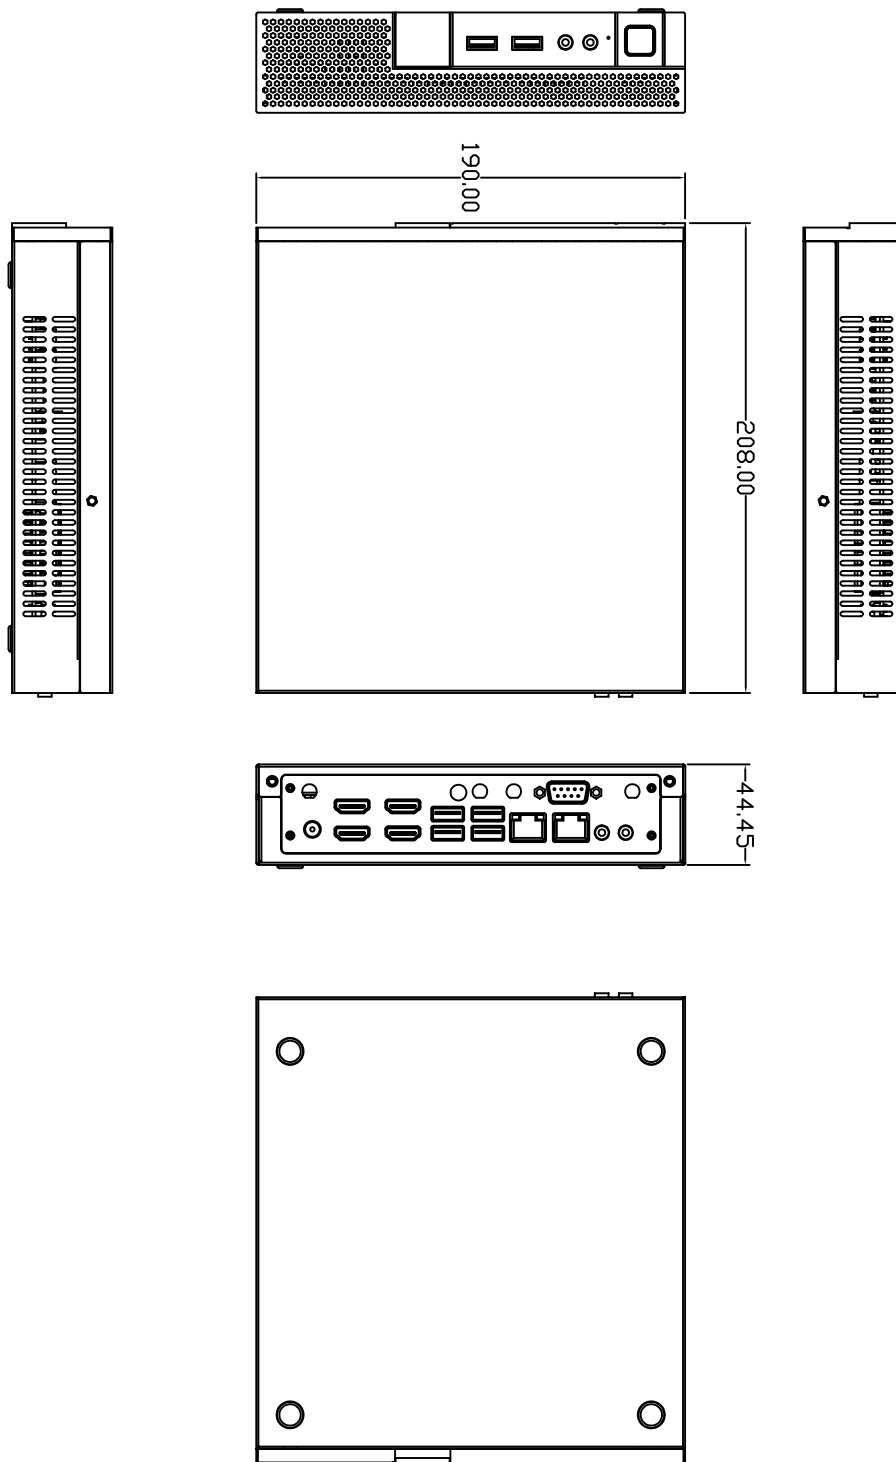

Copyright ©2022 Maxtang Technology Co. Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized.